

Montage & Service Handleiding Go! Pendelset

Famostar emergency lighting


MONTAGE




1 Monteer de pendelbodem en sluit de bedrading aan volgens het aansluitschema.
Verleng de pendel voor de 391876 Go! Pendelset 150 cm volgens onderstaand schema.




2 (1) Bevestig de Go! montagebak P op de Go! pendelbeugel P met de bijgeleverde M4 schroeven.
(2) Steek de pendel in de pendelbeugel en draai de twee M4 inbusschroeven aan.

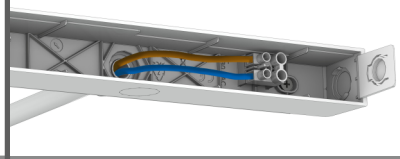

3 Voer de bedrading door de pendel en sluit deze aan op de kroonsteen van de Go! montagebak P volgens het aansluitschema.

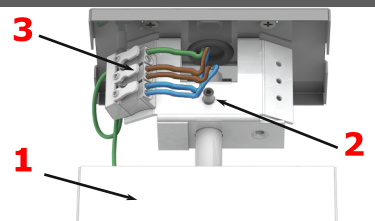



4 (1) Schuif de pendelkap over de pendelbuis.
(2) Monteer de pendel op de pendelbodem.
(3) Sluit de bedrading aan op de kroonsteen van de pendelbodem volgens het aansluitschema.

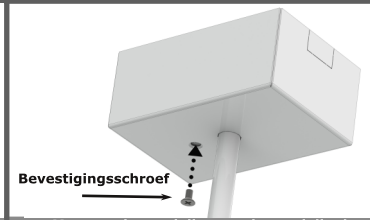

5 Monteer de pendelkap op de pendelbodem met de bevestigingsschroef.
Volg voor verdere montage de handleiding van de Go! Plafond vanaf stap 2.


AANSLUITSCHEMA

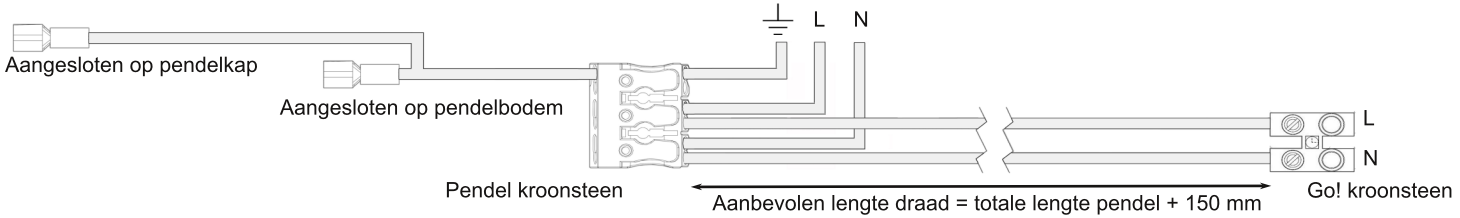

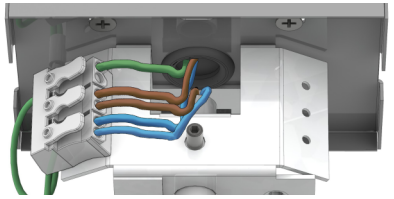


PENDELSET

Onderdelen:

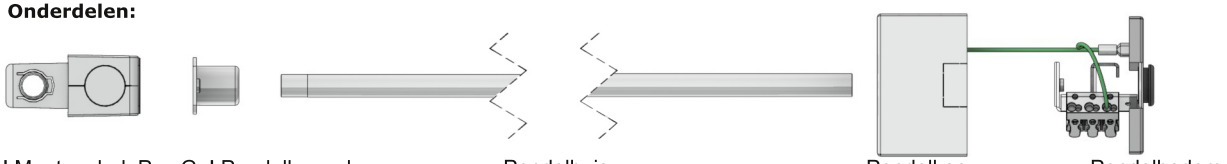

VERLENGEN PENDELBUIS

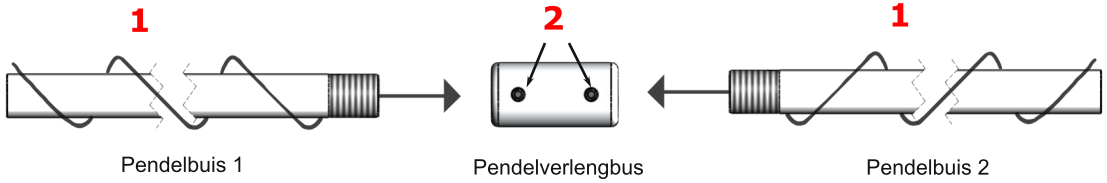

1 Schroef een pendelbuis met de schroefdraadkant op de pendelverlengbus tot deze niet verder kan.
Herhaal dit voor de andere pendelbuis.

2 Draai de twee M4 inbusschroeven aan zodat de pendelbuizen geblokkeerd zijn. Ga verder met stap 2 van de montagehandleiding.


3 De pendelbuizen zijn eventueel op maat te maken door deze aan de zijde zonder schroefdraad af te zagen.

SPECIFICATIES


Type	Artikelnr.
Go! Pendelset 75 cm	391875
Go! Pendelset 150 cm	391876

Montage	Op normaal ontvlambare oppervlaktes
Alleen voor vaste aansluiting	Aansluiten met XMVK, YMVK of gelijkwaardig
Kleur	RAL 9016
Beschermingsklasse	Deze producten moeten geaard te worden
Materiaal	Metaal

Garantie, toebehoren, afmetingen en verdere informatie zie www.famostar.nl.

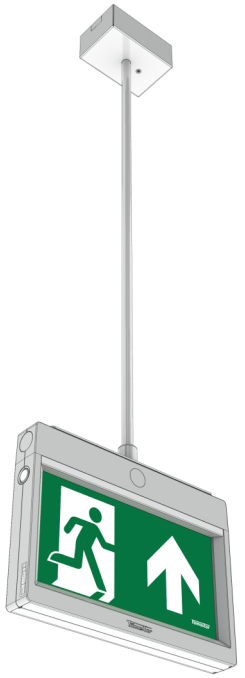

Go! Pendelset 75 cm

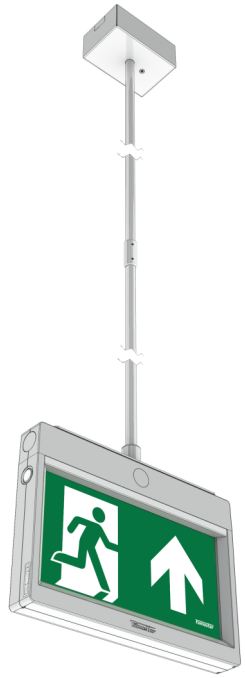


Go! Pendelset 150 cm


Mounting & Service Manual Go! Suspension kit

Famostar emergency lighting


MOUNTING




1 Mount the suspension plate and connect the wires according the wiring diagram. Extend the suspension rod of the 391876 Go! Pendelset 150 cm as shown below.




2 (1) Mount the CELO CS mounting plate on the CELO CS bracket with the M4 screws. (2) Place the suspension rod into the bracket and tighten the two M4 hexagonal screws.

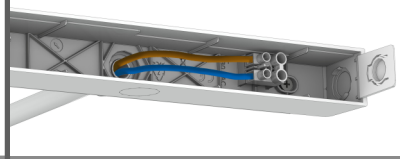

3 Forepole the wiring through the suspension rod and connect the wires on the connector of the CELO CS mounting plate according the

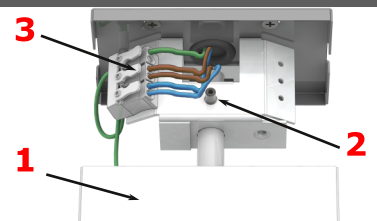



4 (1) Place the suspension cover over the rod. (2) Mount the rod onto the suspension plate. (3) Connect the wires on the connector of the suspension plate according the wiring diagram.

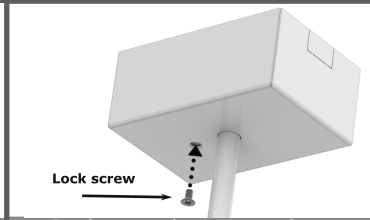

5 Put the suspension cover over the suspension plate and tighten the lock screw. Continue with step 2 of the mounting and service manual of the Go! Ceiling.


WIRING DIAGRAM

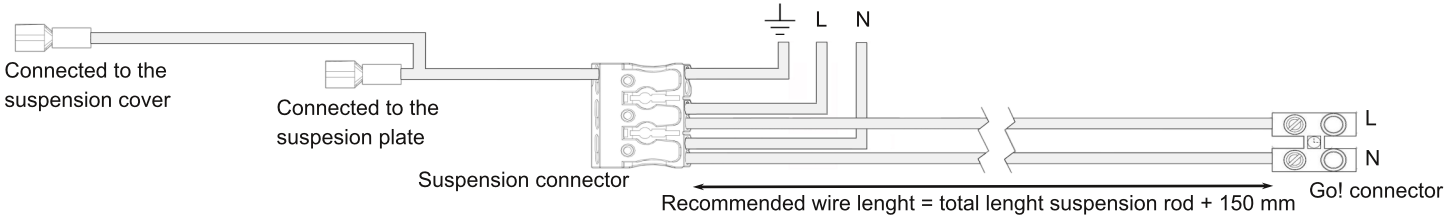

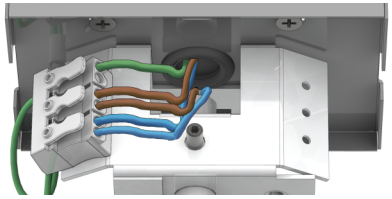


SUSPENSION KIT

Suspension parts:

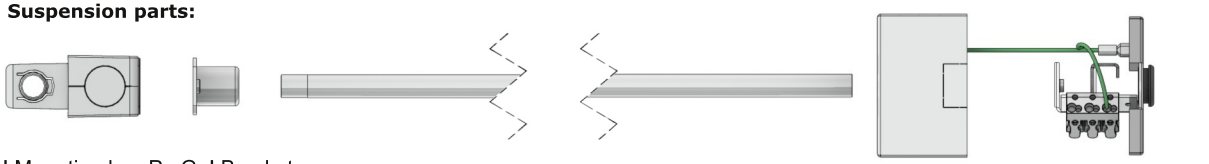

EXTEND SUSPENSION ROD

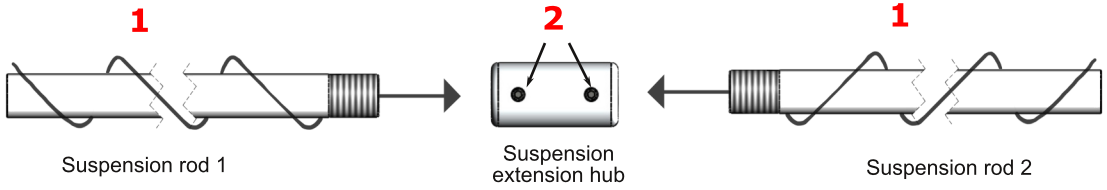

1 Screw a suspension rod with the threadside in the suspension extension hub. Repeat this for the other suspension rod.

2 Tighten the M4 hexagonal screws until the suspension rods are locked. Continue with step 2 of this mounting manual.


3 The suspension rods can be cropped to the desired length by sawing of the side without thread.

SPECIFICATIONS


Type	Article no.
Go! Pendelset 75 cm	391875
Go! Pendelset 150 cm	391876

Mounting	Installation on normal flammable surfaces
Only for fixed mounting	Use XMVK, YMVK or equivalent
Color	RAL 9016
Insulation class	This product needs a ground connection
Material	Metal

Warranty, accessoires, dimensions and further information see www.famostar.nl.

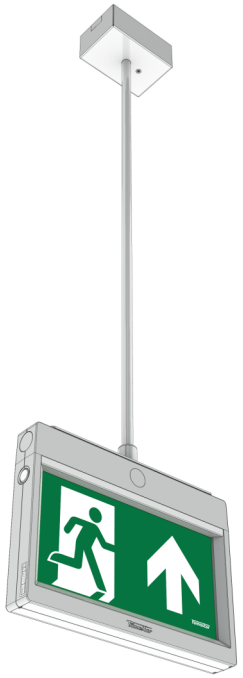

Go! Pendelset 75 cm

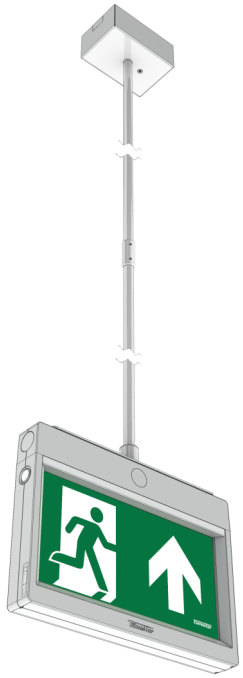

Go! Pendelset 150 cm